



# Test Report: XDR-240-36

---

240W AC/DC High-End Ultra Slim Industrial DIN Rail  
Power

## ■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Control Function Test

Component Stress Test

## ■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test



## ■ RELIABILITY TEST

ENVIRONMENT TEST

## DESIGN VERIFY TEST


### OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 36V~42V	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	34.8V~43.077V/277VAC 34.799V~43.08V/230VAC 34.802V~43.081V/115VAC
2	OUTPUT VOLTAGE TOLERANCE	V1: -1% ~ +1%	I/P: 85VAC~305VAC O/P:FULL~MIN. LOAD Ta:25°C	V1: -0.08% ~ 0%
3	LINE REGULATION	V1: -0.5% ~ +0.5%	I/P: 85VAC~ 305VAC O/P:FULL LOAD Ta:25°C	V1: -0.0083% ~ 0.0195%
4	LOAD REGULATION	V1: -1% ~ +1%	I/P: 230VAC O/P:FULL ~MIN LOAD Ta:25°C	V1: -0.0333% ~ 0.0389%
5	OVER/UNDERSHOOT TEST	<±5%	I/P: 230VAC O/P:FULL LOAD / NO LOAD/ PEAK LOAD Ta:25°C	0.86%
6	RIPPLE & NOISE (Max )	V1: 120mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	23mVp-p / high frequency 43mVp-p / low frequency
		<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p>high frequency :</p> </div> <div style="text-align: center;"> <p>low frequency :</p> </div> </div>		
7	SET UP TIME(Max)	277VAC/1500ms 230VAC/1500ms 115VAC/3000ms	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	277VAC/401ms 230VAC/402ms 115VAC/ 402.8ms
INPUT=277VAC/50HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage			INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage	

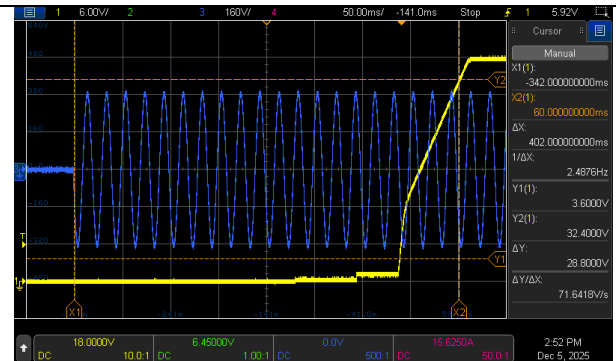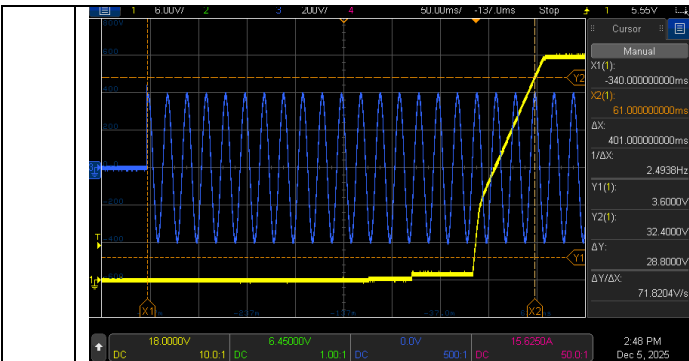

INPUT=115VAC/60HZ @ FULL LOAD


CH1: Output Voltage CH3: AC Input Voltage

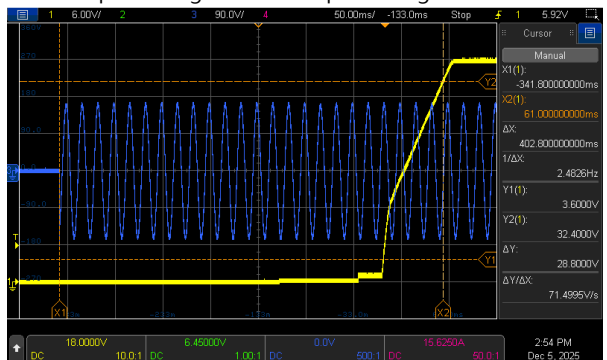

8	RISE TIME (Max)	277VAC/150ms	I/P : 277 VAC	277VAC/ 62.8ms
		230VAC/150ms	I/P : 230 VAC	230VAC/ 61.4ms
		115VAC/150ms	I/P : 115 VAC	115VAC/ 62.6ms
			O/P : FULL LOAD	
			Ta : 25°C	


INPUT=277VAC/50HZ @ FULL LOAD

CH1: Output Voltage CH3: AC Input Voltage

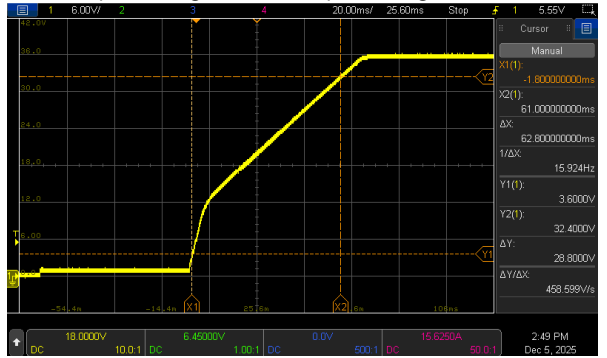


INPUT=230VAC/50HZ @ FULL LOAD

CH1: Output Voltage CH3: AC Input Voltage

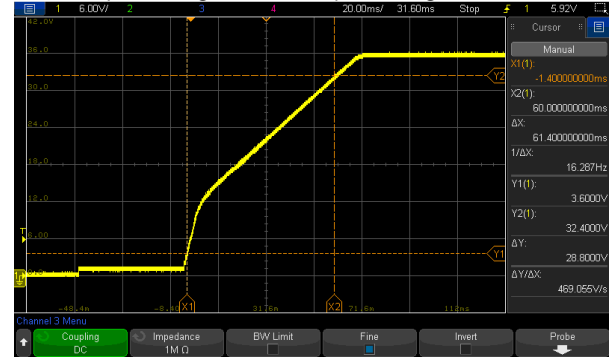

INPUT=115VAC/60HZ @ FULL LOAD

CH1: Output Voltage CH3: AC Input Voltage

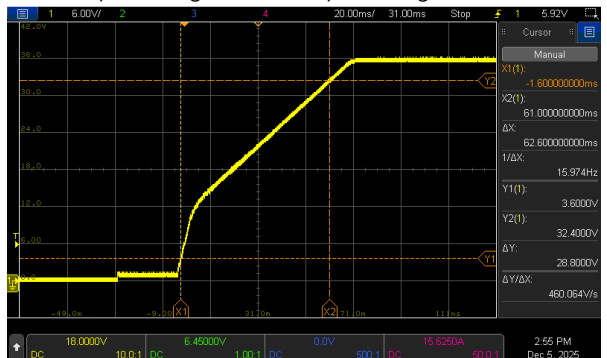


9	HOLD UP TIME (Typ.)	277VAC/20ms 230VAC/ 20ms 115VAC/ 20ms	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	277VAC/31.4 ms 230VAC/ 31.4ms 115VAC/ 31.4ms
INPUT=277VAC/50HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage		INPUT=230VAC/50HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage		
INPUT=115VAC/60HZ @ FULL LOAD CH1: Output Voltage CH3: AC Input Voltage				
10	DYNAMIC LOAD	V1: 3600mVp-p	I/P: 230VAC O/P: (1) FULL/ MIN LOAD 50%DUTY / 120HZ (2) FULL/ MIN LOAD 50%DUTY / 1KHZ Ta:25°C	519mVp-p 422mVp-p
FULL / MIN LOAD 50%DUTY / 120HZ		FULL / MIN LOAD 50%DUTY / 1KHZ		
11	TRANSIENT RECOVERY TIME	V1: 3600mVp-p <500us	I/P: 230VAC O/P:40% LOAD CHANGE 50%DUTY/120HZ 1.25A/us	225mVp-p

### INPUT FUNCTION TEST


NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT												
1	INPUT VOLTAGE RANGE	85VAC~305VAC 80VDC~ 431VDC	(1) I/P: TESTING O/P: FULL / 85% LOAD (2) I/P: DC TESTING (L: + N: -) O/P: FULL / 85% LOAD/ 50% LOAD (3) I/P: DC TESTING (L: - N: +) O/P: FULL / 85% LOAD/ 50% LOAD Ta:25°C	(1) 76.9V~305V/ FULL LOAD 76.7V~305V/ 85% LOAD (2) 75.5Vdc~431Vdc/FULL LOAD 75.5Vdc~431Vdc/85% LOAD 75.5Vdc~431Vdc/50% LOAD (3) 75.5Vdc~431Vdc/FULL LOAD 75.5Vdc~431Vdc/85% LOAD 75.5Vdc~431Vdc/50% LOAD												
			I/P: HIGH-LINE+10V=315V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN ( POWER ON/OFF NO DAMAGE )	TEST : OK												
		Derating 50% Load @80VDC	I/P: 80VDC O/P: 50% Load	TEST : OK												
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P: 85VAC~ 305VAC O/P:FULL~MIN LOAD Ta:25°C	TEST : OK												
3	INPUT CURRENT (Typ.)	277V/ 1.1A 230V/ 1.3A 115V/ 2.6A	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =0.98A/ 277VAC I =1.11A/ 230VAC I =2.23A/ 115VAC												
4	LEAKAGE CURRENT	< 1mA@240Vac < 1.3mA@277Vac	I/P : 240VAC/60HZ I/P : 277VAC/60HZ O/P : Min LOAD Ta : 25°C	0.736mA@240Vac 0.844mA@277Vac												
5	NO LOAD CONSUMPTION	Remote Power OFF: 1W@115Vac & 230Vac& 277Vac Remote Power ON: 2.5W@115Vac & 230Vac& 277Vac	I/P : 115VAC I/P : 230VAC I/P : 277VAC O/P : NO LOAD Ta : 25°C	TEST: <table border="1"> <thead> <tr> <th></th> <th>Remote Power OFF</th> <th>Remote Power ON</th> </tr> </thead> <tbody> <tr> <td>115VAC</td> <td>0.56W</td> <td>1.62W</td> </tr> <tr> <td>230VAC</td> <td>0.66W</td> <td>1.66W</td> </tr> <tr> <td>277VAC</td> <td>0.73W</td> <td>1.69W</td> </tr> </tbody> </table>		Remote Power OFF	Remote Power ON	115VAC	0.56W	1.62W	230VAC	0.66W	1.66W	277VAC	0.73W	1.69W
	Remote Power OFF	Remote Power ON														
115VAC	0.56W	1.62W														
230VAC	0.66W	1.66W														
277VAC	0.73W	1.69W														
6	POWER FACTOR (Typ.)	0.9/277VAC 0.95/ 230VAC 0.98/115VAC	I/P : 277VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	PF=0.9196/277VAC PF=0.9802/230VAC PF=0.9975/115VAC												

	<p>P.F vs LOAD</p> <table border="1"> <caption>P.F vs LOAD Data</caption> <thead> <tr> <th>LOAD (%)</th> <th>115VAC PF</th> <th>230VAC PF</th> <th>277VAC PF</th> </tr> </thead> <tbody> <tr><td>10%</td><td>0.92</td><td>0.60</td><td>-</td></tr> <tr><td>20%</td><td>0.98</td><td>0.72</td><td>-</td></tr> <tr><td>30%</td><td>0.99</td><td>0.87</td><td>0.65</td></tr> <tr><td>40%</td><td>0.99</td><td>0.93</td><td>0.75</td></tr> <tr><td>50%</td><td>0.99</td><td>0.95</td><td>0.82</td></tr> <tr><td>60%</td><td>0.99</td><td>0.96</td><td>0.85</td></tr> <tr><td>70%</td><td>0.99</td><td>0.97</td><td>0.88</td></tr> <tr><td>80%</td><td>0.99</td><td>0.97</td><td>0.89</td></tr> <tr><td>90%</td><td>0.99</td><td>0.97</td><td>0.90</td></tr> <tr><td>100%</td><td>0.99</td><td>0.98</td><td>0.91</td></tr> </tbody> </table>				LOAD (%)	115VAC PF	230VAC PF	277VAC PF	10%	0.92	0.60	-	20%	0.98	0.72	-	30%	0.99	0.87	0.65	40%	0.99	0.93	0.75	50%	0.99	0.95	0.82	60%	0.99	0.96	0.85	70%	0.99	0.97	0.88	80%	0.99	0.97	0.89	90%	0.99	0.97	0.90	100%	0.99	0.98	0.91
LOAD (%)	115VAC PF	230VAC PF	277VAC PF																																													
10%	0.92	0.60	-																																													
20%	0.98	0.72	-																																													
30%	0.99	0.87	0.65																																													
40%	0.99	0.93	0.75																																													
50%	0.99	0.95	0.82																																													
60%	0.99	0.96	0.85																																													
70%	0.99	0.97	0.88																																													
80%	0.99	0.97	0.89																																													
90%	0.99	0.97	0.90																																													
100%	0.99	0.98	0.91																																													
7	EFFICIENCY(Typ.)	95.5%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	96.13%																																												
	<p>EFFICIENCY vs LOAD</p> <table border="1"> <caption>EFFICIENCY vs LOAD Data</caption> <thead> <tr> <th>LOAD (%)</th> <th>115VAC (%)</th> <th>230VAC (%)</th> <th>277VAC (%)</th> </tr> </thead> <tbody> <tr><td>10%</td><td>84</td><td>85</td><td>84</td></tr> <tr><td>20%</td><td>90</td><td>91</td><td>91</td></tr> <tr><td>30%</td><td>92</td><td>93</td><td>93</td></tr> <tr><td>40%</td><td>93</td><td>94</td><td>94</td></tr> <tr><td>50%</td><td>94</td><td>95</td><td>95</td></tr> <tr><td>60%</td><td>94</td><td>95</td><td>95</td></tr> <tr><td>70%</td><td>94</td><td>95</td><td>95</td></tr> <tr><td>80%</td><td>94</td><td>95</td><td>95</td></tr> <tr><td>90%</td><td>94</td><td>95</td><td>95</td></tr> <tr><td>100%</td><td>94</td><td>95</td><td>95</td></tr> </tbody> </table>				LOAD (%)	115VAC (%)	230VAC (%)	277VAC (%)	10%	84	85	84	20%	90	91	91	30%	92	93	93	40%	93	94	94	50%	94	95	95	60%	94	95	95	70%	94	95	95	80%	94	95	95	90%	94	95	95	100%	94	95	95
LOAD (%)	115VAC (%)	230VAC (%)	277VAC (%)																																													
10%	84	85	84																																													
20%	90	91	91																																													
30%	92	93	93																																													
40%	93	94	94																																													
50%	94	95	95																																													
60%	94	95	95																																													
70%	94	95	95																																													
80%	94	95	95																																													
90%	94	95	95																																													
100%	94	95	95																																													
8	INRUSH CURRENT(Typ.)	277V/15A 230V/10A 115V/6A COLD START	I/P : 277 VAC I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =10.9A / 277VAC I =8.91A / 230VAC I =4.39A / 115VAC T50=2012.4us/230V																																												
	INPUT=277VAC/50HZ @ FULL LOAD CH1: AC Input Voltage CH4: Input current		INPUT=230VAC/50HZ @ FULL LOAD CH1: AC Input Voltage CH4: Input current																																													


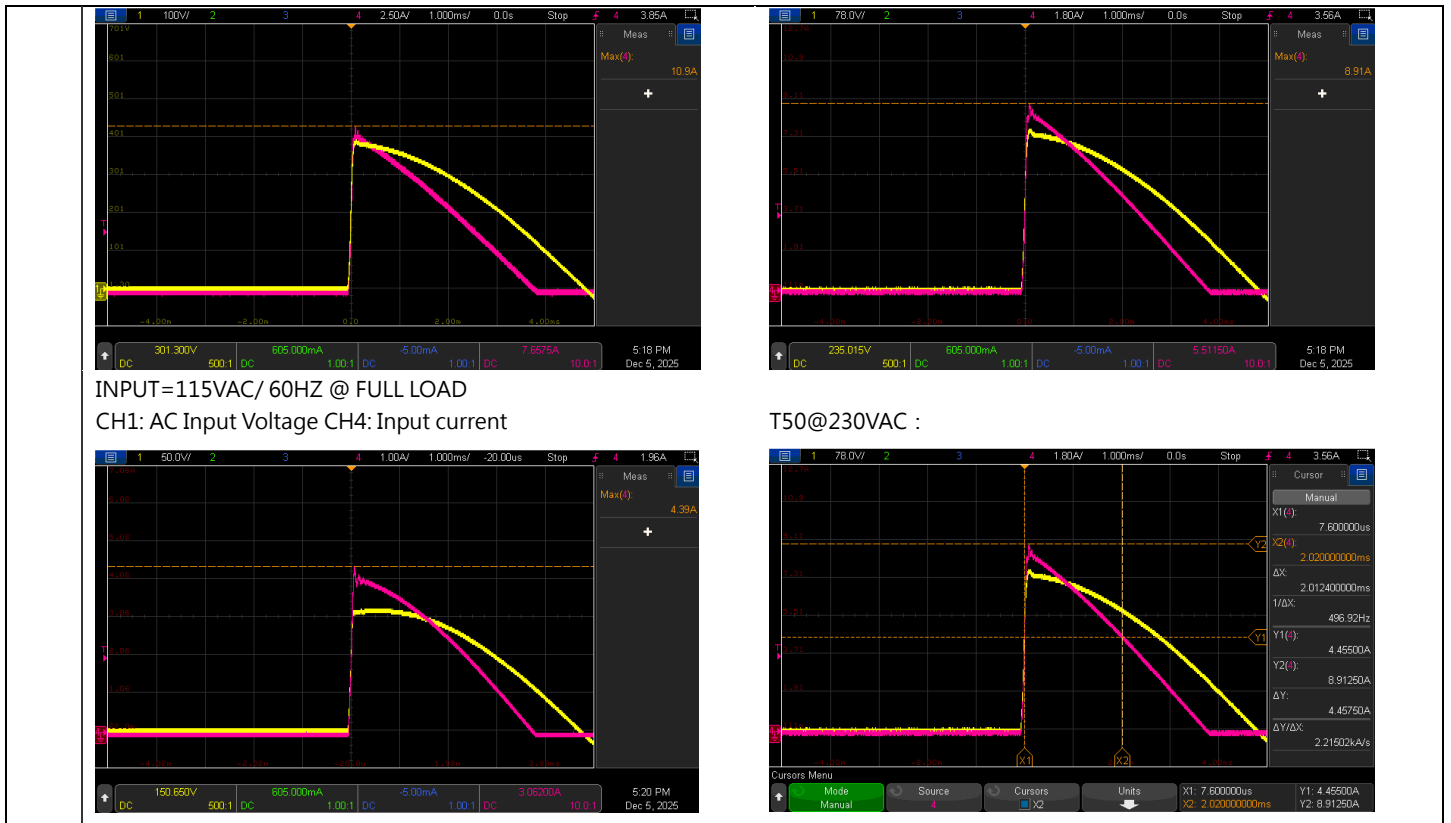


### PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	Protection type: 105%~200% rated output power for more than 5 sec then constant current limiting at rate current without shutdown when $V_o=30\% \sim 100\%$ ; Hiccup mode when $V_o < 30\%$ rated voltage	I/P: 305VAC I/P: 230VAC I/P: 100VAC O/P: TESTING $T_a: 25^\circ\text{C}$	TEST : 127.63%/305VAC 127.63%/230VAC 127.63%/100VAC Protection type: 105%~200% rated output power for more than 5 sec then constant current limiting at rate current without shutdown when $V_o=30\% \sim 100\%$ ; Hiccup mode when $V_o < 30\%$ rated voltage
2	OVER VOLTAGE PROTECTION	43V~50V Protection type: Shut down o/p voltage, re-power on to recover	I/P: 305VAC I/P: 85VAC O/P: MIN LOAD $T_a: 25^\circ\text{C}$	46.1V/ 305VAC 46.1V/ 85VAC PROTECTION TYPE : Shut down o/p voltage, re-power on to recover
3	OVER TEMPERATURE PROTECTION	Protection type: Shut down o/p voltage, recovers automatically after temperature goes down	I/P: 305VAC I/P: 85VAC O/P: FULL LOAD	O.T.P. Active OK Protection type : Shut down o/p voltage, recovers automatically after temperature goes down

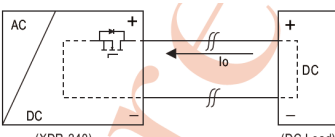4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE Protection type: Hiccup mode when $V_o < 30\%$ rated voltage , recovers automatically after fault condition is removed	I/P: 305VAC I/P: 85VAC O/P: FULL LOAD	NO DAMAGE PROTECTION TYPE : OK Hiccup mode when $V_o < 30\%$ rated voltage , recovers automatically after fault condition is removed
5	Protection against Inverse Voltages from the Load	Prevent PSU damage from Back Electro magnetic Force during deceleration of motor or inductive load 	I/P: 230VAC O/P: TESTING Ta: 25°C	TEST : <u>OK</u>

### CONTROL FUNCTION TEST

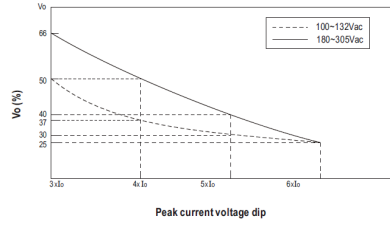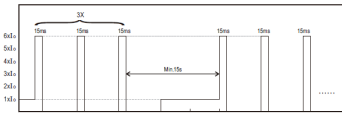NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																								
1	DC OK CONTACT RATINGS	30VDC/1A , 30VAC/0.5A RESISTIVE LOAD	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	TEST: <u>OK</u>																																								
2	REMOTE CONTROL	Power ON: Pin9 and Pin10 Short or keep 4~5Vdc Power OFF: Pin9 and Pin10 Open or keep < 0.5Vdc	I/P: 230VAC O/P: FULL LOAD Ta: 25°C	TEST: <u>OK</u>																																								
3	PULSE CURRENT CAPABILITY	 <p>Peak current voltage dip</p> <table border="1"> <thead> <tr> <th>Load</th> <th>100~132Vac Vo(%)</th> <th>180~305Vac Vo(%)</th> <th>Time</th> </tr> </thead> <tbody> <tr> <td>3xIo</td> <td>50</td> <td>66</td> <td>100ms</td> </tr> <tr> <td>4xIo</td> <td>37</td> <td>50</td> <td>70ms</td> </tr> <tr> <td>5xIo</td> <td>30</td> <td>40</td> <td>40ms</td> </tr> <tr> <td>6xIo</td> <td>25</td> <td>25</td> <td>15ms</td> </tr> </tbody> </table>	Load	100~132Vac Vo(%)	180~305Vac Vo(%)	Time	3xIo	50	66	100ms	4xIo	37	50	70ms	5xIo	30	40	40ms	6xIo	25	25	15ms	I/P: 180VAC I/P: 100VAC O/P: TESTING Ta: 25°C	<b>180V :</b> <table border="1"> <thead> <tr> <th>Load</th> <th>Io<sub>out</sub>_Time(ms)</th> </tr> </thead> <tbody> <tr> <td>3xIo</td> <td>111</td> </tr> <tr> <td>4xIo</td> <td>85</td> </tr> <tr> <td>5xIo</td> <td>52.3</td> </tr> <tr> <td>6xIo</td> <td>27.18</td> </tr> </tbody> </table> <b>100V :</b> <table border="1"> <thead> <tr> <th>Load</th> <th>Io<sub>out</sub>_Time(ms)</th> </tr> </thead> <tbody> <tr> <td>3xIo</td> <td>113</td> </tr> <tr> <td>4xIo</td> <td>88</td> </tr> <tr> <td>5xIo</td> <td>51.4</td> </tr> <tr> <td>6xIo</td> <td>26</td> </tr> </tbody> </table>	Load	Io <sub>out</sub> _Time(ms)	3xIo	111	4xIo	85	5xIo	52.3	6xIo	27.18	Load	Io <sub>out</sub> _Time(ms)	3xIo	113	4xIo	88	5xIo	51.4	6xIo	26
Load	100~132Vac Vo(%)	180~305Vac Vo(%)	Time																																									
3xIo	50	66	100ms																																									
4xIo	37	50	70ms																																									
5xIo	30	40	40ms																																									
6xIo	25	25	15ms																																									
Load	Io <sub>out</sub> _Time(ms)																																											
3xIo	111																																											
4xIo	85																																											
5xIo	52.3																																											
6xIo	27.18																																											
Load	Io <sub>out</sub> _Time(ms)																																											
3xIo	113																																											
4xIo	88																																											
5xIo	51.4																																											
6xIo	26																																											
4	PULSE CURRENT CAPABILITY		I/P: 230VAC O/P: TESTING Ta: 25°C	TEST : <u>OK</u>																																								



5	LED Status Indicators	<table border="1"> <thead> <tr> <th>Description</th> <th>Output of Alarm</th> </tr> </thead> <tbody> <tr> <td>Restore Factory Settings</td> <td>Green : 3 Blink/Pause</td> </tr> <tr> <td>DC OK</td> <td>Green</td> </tr> <tr> <td>DC Fail</td> <td>Red</td> </tr> <tr> <td>Overload (100%: +50% rated current) (200%: +200% rated current)</td> <td>Red : 1 Blink/Pause</td> </tr> <tr> <td>Over voltage</td> <td>Red : 2 Blink/Pause</td> </tr> <tr> <td>Over temperature</td> <td>Red : 3 Blink/Pause</td> </tr> <tr> <td>Applied Reverse Voltages From The Load</td> <td>Red : 4 Blink/Pause</td> </tr> <tr> <td>High Ambient Temperature Warning</td> <td>Red : Blink</td> </tr> <tr> <td>Others (None)</td> <td>Red : 5 Blink/Pause</td> </tr> </tbody> </table> <p><small>Note: Others include protection status,AC input, Internal Communication error and EEPROM error.</small></p>	Description	Output of Alarm	Restore Factory Settings	Green : 3 Blink/Pause	DC OK	Green	DC Fail	Red	Overload (100%: +50% rated current) (200%: +200% rated current)	Red : 1 Blink/Pause	Over voltage	Red : 2 Blink/Pause	Over temperature	Red : 3 Blink/Pause	Applied Reverse Voltages From The Load	Red : 4 Blink/Pause	High Ambient Temperature Warning	Red : Blink	Others (None)	Red : 5 Blink/Pause	I/P:230VA0C O/P: TESTING Ta:25°C	TEST: <u>OK</u>
Description	Output of Alarm																							
Restore Factory Settings	Green : 3 Blink/Pause																							
DC OK	Green																							
DC Fail	Red																							
Overload (100%: +50% rated current) (200%: +200% rated current)	Red : 1 Blink/Pause																							
Over voltage	Red : 2 Blink/Pause																							
Over temperature	Red : 3 Blink/Pause																							
Applied Reverse Voltages From The Load	Red : 4 Blink/Pause																							
High Ambient Temperature Warning	Red : Blink																							
Others (None)	Red : 5 Blink/Pause																							
6	PARALLEL	Up to 960W (3+1), please refer to Function Manual for more details	I/P: TESTING O/P: TESTING LOAD Ta:25°C	TEST: <u>OK</u>																				
7	PEAK Power	<p>I/P: 100/200VAC O/P:</p> <p>-----100VAC      ——200VAC</p>	TEST: <u>OK</u>																					

### COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) Peak Voltage	Q5/Q6 : Rated: 600V/21A	AC ON/OFF I/P: High-Line +3V =308V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8) Peak Load Ta:25°C	Q5                  Q6 VDS:                  VDS: (1) 501V              (1) 505V (2) 525V              (2) 509V (3) 505V              (3) 505V (4) 509V              (4) 505V (5) 505V              (5) 505V (6) 509V              (6) 505V (7) 517V              (7) 509V (8) 513V              (8) 505V
2	P.F.C Transistor ( D to S) or (C to E) Peak Voltage	Q1 : Rated: 600V/34A	AC ON/OFF I/P: High-Line +3V =308V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz	VDS: (1) 452V (2) 454V (3) 451V (4) 451V (5) 451V (6) 454V (7) 454V (8) 447V



			(5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8) Peak Load Ta:25°C	
3	P.F.C DIODE	D1 : Rated: 4A/650V	I/P: High-Line +3V =308 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (4) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (5) Peak Load Ta:25°C	(1) 417V (2) 410V (3) 427V (4) 427V (5) 427V
4	Diode Peak Voltage	Q101/Q103: Rated: 150V/76A	AC ON/OFF I/P: High-Line +3V =308 V <u>VO=Vomax</u> O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD (9) Peak Load  <u>VO=Vonormal</u> O/P: (1) Full Load Ta:25°C	Q101: <u>VO=Vomax</u> VDS: (1) 106V (2) 106V (3) 106V (4) 106V (5) 106V (6) 106V (7) 105.3V (8) 102.4V (9) 112.5V <u>VO=Vonormal</u> (1) 95.9V Q103: <u>VO=Vomax</u> VDS: (1) 99.5V (2) 99.5V (3) 101.7V (4) 99.5V (5) 99.5V (6) 103.9V (7) 108.2V (8) 95.2V (9) 101.7V <u>VO=Vonormal</u> (1) 91V
5	AUX Transistor ( D to S) or (C to E) Peak Voltage	U2 : Rated: 725V/654mA	AC ON/OFF I/P: High-Line +3V =308V VDS: O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/	VDS: (1) 569V (2) 565V (3) 565V (4) 565V (5) 565V (6) 565V (7) 565V (8) 565V



			Min. Load 50%Duty/120Hz (7)0%→400% Load. (8) Peak Load Ta:25°C	
6	AUX Clamp Diode Peak Voltage	D 19 : Rated : 1A/ 650V	AC ON/OFF I/P : High-Line +3V = 308V O/P : (1) Dynamic Load 90%Duty/1KHz (2) Full load continue Ta : 25°C	(1) 538V (2) 519V
7	AUX Diode Peak Voltage	D200 : US1D Rated : 1A/200V  D22 : ES1J Rated : 1A/600V	AC ON/OFF I/P: High-Line +3V =308 V O/P: (1)Full Load (2)Output Short (3) Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4) Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5) Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6) Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD (9) Peak Load Ta:25°C	D200: (1) 104.2V (2) 103.5V (3) 104.2V (4) 105.7V (5) 104.2V (6) 104.2V (7) 105.7V (8) 103.5V (9) 105.7V  D22: (1) 121.6V (2) 120.7V (3) 119.9V (4) 119.0V (5) 120.7V (6) 119.9V (7) 120.7V (8) 118.2V (9) 121.6V
8	Input Capacitor Voltage	C5 : Rated: 100μ /450V	I/P: High-Line +3V =308V O/P: (1)Full Load input on/off (2) Min load input on /Off (3) Full Load /Min load Change (4) Full load continue (5) Peak Load on/off (6) Peak Load continue Ta:25°C	(1) 440V (2) 444V (3) 437V (4) 431V (5) 444V (6) 431V
9	Control IC Voltage Test	PFC/PWM IC U1 : Rated : 12.5V~ 27.9V Vstart=18.2~19.7V  O/P IC U101: Rated: 4.75V~38V  IC U205 : Rated : 3.3V~36V  IC U404 : Rated : 3V~36V  AUX IC U2 :	AC ON/OFF I/P: High-Line +3V =308V O/P: (1) Full Load (2) Output Short (3) O.L.P (4) O.V.P. (5) No Load VR min (Low Line)  MCU : 36V/85V (1) Full Load (2) Output Short (3) O.L.P (4) O.V.P. (5) No Load VR min (LOW LINE) Ta:25°C	U1 (1) 20.5V (2) 18.7V (3) 23.2V (4) 15.2V (5) 20.3V  U2 (1) 6.43V (2) 6.52V (3) 6.48V (4) 6.43V (5) 6.43  U101 (1) 12.95V (2) 15.94V (3) 13.24V (4) 14.11V (5) 14.11V  U102 (1) 14.2V (2) 14.2V (3) 14.2V (4) 14.2V (5) 14.2V  U205  U9



		Rated : 5.65V~6.8V		(1) 14.78V	(1) 3.306V
		ORING IC U102 :		(2) 14.78V	(2) 3.306V
		Rated : 3V~32V		(3) 13.78V	(3) 3.306V
		MCU IC U9 :		(4) 14.69V	(4) 3.306V
		Rated : 2V~3.6V		(5) 14.69V	(5) 3.306V
		Level: 3.2835~3.3165V		U404	U306
		MCU IC U306:		(1) 5.61V	(1) 3.298V
		Rated : 2.4V~ 3.6V		(2) 5.62V	(2) 3.298V
		Level: 3.2835~3.3165V		(3) 5.58V	(3) 3.298V
				(4) 5.58V	(4) 3.298V
				(5) 5.58V	(5) 3.298V

## ■ SAFETY& E.M.C. TEST

### SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4 KVAC/min I/P-FG: 2 KVAC/min O/P-FG:1.5 KVAC/min O/P-DC OK: 0.5 KVAC/min	I/P-O/P: 4.4 KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG: 1.8 KVAC/min O/P-DC OK: 0.6 KVAC/min Ta:25°C	I/P-O/P: 3.89mA I/P-FG: 3.8mA O/P-FG: 4.13mA O/P-DC OK: 0.007mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 600 VDC I/P-FG: 600 VDC O/P-FG: 600 VDC Ta:25°C	I/P-O/P: 50GΩ I/P-FG: 50 GΩ O/P-FG: 50GΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100mΩ	40A /2min Ta:25°C	5mΩ

### E.M.C TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	BS EN/EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:FULL LOAD Ta:25°C	PASS
2	CONDUCTION	BS EN/EN55032 (CISPR32) BS EN/EN61204-3 CNS15936 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	BS EN/EN55032 (CISPR32) BS EN/EN61204-3 CNS15936 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	BS EN/EN 61000-4-2 AIR : 15KV / Contact : 8KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A





2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR ( MIN )	I/P : 230 VAC O/P : 122%LOAD Ta : 25°C	TEST : OK
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	I/P : 305VAC/100VAC O/P : 80%100%LOAD Ta= -45°C/-35°C	TEST : OK
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 60°C/95 %R.H NO DAMAGE	I/P : 315 VAC O/P : FULL LOAD Ta= 60°C HUMIDITY= 95 %R.H	TEST : OK
5	TEMPERATURE COEFFICIENT	± 0.03%/°C(0~60°C)	I/P : 230 VAC O/P : FULL LOAD	±0.003%/°C(0~60°C)
6	STORAGE TEMPERATURE TEST	-40~85°C	1. Thermal shock Temperature : -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : STATIC	
7	THERMAL SHOCK TEST	-30~60°C	1. Thermal shock Temperature : -35°C~ +65°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 16 CYCLE 5. Input/Output condition : 15cycle:230V/ FULL LOAD AC ON 3sec/AC OFF 1sec TEST 1cycle:230V/ FULL LOAD Burn In Test	
8	VIBRATION TEST	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 3G (5) Test Time : 180min in each axis (X.Y.Z) (6) Ta : 25°C	
9	CAPACITOR LIFE CYCLE	SUPPOSE C107 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25°C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 60°C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta= 60°C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 60°C LIFE TIME	(1) 886081HRS (2) 85112HRS (3) 107606HRS (4) 158968HRS	
10	MTBF	Conducted by Parts Stress Analysis Prediction 1066.2K hrs min. Telcordia SR-332 (Bellcore) ; 129.1K hrs min. MIL-HDBK-217F (25°C)		
11	Ongoing Reliability Test	I/P : 230VAC O/P : FULL LOAD TA=50°C Demonstration Mean Time Between Failure : 50,000 hours		

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	Hanxr	Liutt	Wangdz

2020.10.1 TAG-QA-009